


LED Globe Display Specs-P4 1.5m

Technical data		
1	LED Lamp	SMD2121 black lamp
2	LED configuration	1R1G1B
3	R/G/B light proportion	3:6:01
4	Pixel pitch	4mm
5	Pixel density	62500pixels/m ²
6	LED globe diameter	1.5m
7	Driving mode	Constant current, 1/16S
8	Weight	28KG/m ²
9	brightness	≥ 1500 cd/m ²
10	Viewing angle	360°
11	Best viewing distance	4-40m
12	Gray scale	≥16bits/ 4096 level
13	Color	1.67billion
14	Max. power	800 W/m ²
15	Ave. power	400W/m ²
16	Power supply	110V / 220V,50-60Hz
17	Frame frequency	60Hz
18	Refresh rate	≥1200Hz
19	Brightness adjustment	0-100%
20	Video source	S-Video,RGB,RGBHV, YUV, YC,Composition
21	OS	Windows
22	Control system	Mooncell
23	Storage temperature	(-40℃~+85℃)
24	Working temperature	(-20℃~+50℃)
25	Working humidity	10-90% RH
26	Display life to 50% brightness	100,000Hours
27	MTBF	5000Hours
28	Protection level	IP31
29	Module seam	≅2mm



Project Cases

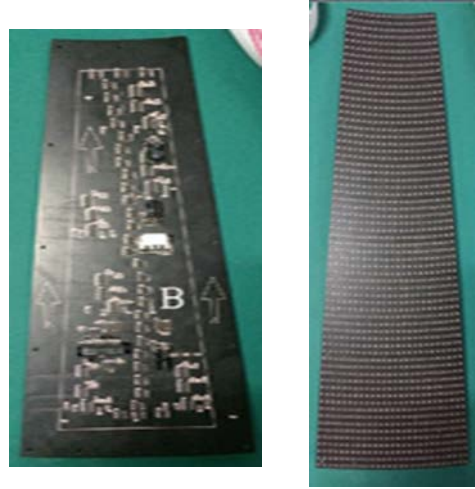

Price:21,000USD/set