


Visualpower P2.976 outdoor event rental led display



LED module 250*250mm resolution:84*84 pixels



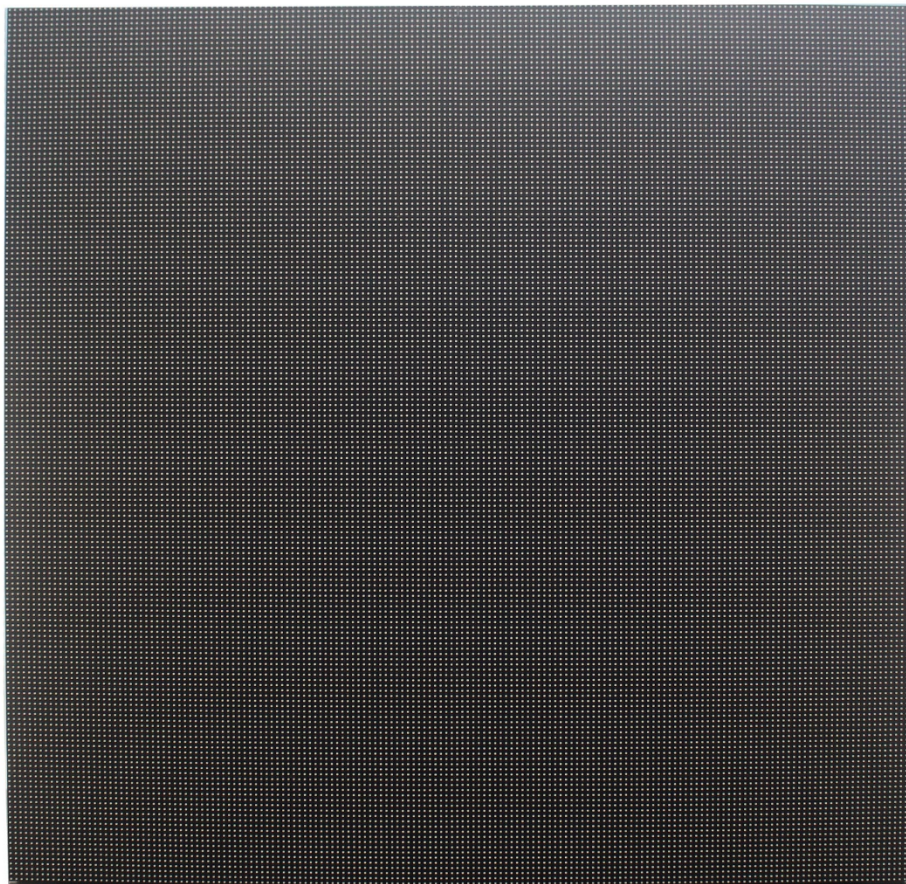

Cabinet size: 500*500mm resolution: 168*168 pixels

Real outdoor design, IP65 protection level. 4500nits brightness.



Module soft connection, back service

Specs data:

Model	P2.976
Pixel configuration	SMD1515
Pixel pitch	2.976mm
Scan rate	1/21 scan, constant current
Module size (W×H)	250*250MM
Resolution per module	W 84 x H 84pixels
Standard cabinet dimension(W×H×D)	500×500×75mm
Pixel resolution/cabinet (W×H)	168x 168pixels
Resolution/sqm	112,896dots/m ²
Minimum viewing distance	Minimum 2 meters
Max.Brightness	4500nits
Gray scale	16 bit, 8192 steps
Color Number	281 trillion
Display Mode	Synchronous with video source
Refresh rate	≥3840HZ
Viewing angle(degree)	H/160,V/140
Temperature range	-20℃ to +60℃
Ambient Humidity	10%-99%
Service access	Rear
Standard cabinet weight	8.5kgs/cabinet
Max.Power Consumption	Max: 680w/sqm
Ave. Power consumption	Ave.340W/sqm
Protection Level	Front: IP65 Rear: IP54
Lifetime to 50% brightness	75,000hr
LED Failure Rate	<0,00001
MTBF	> 10.000 hours
Input power cable	AC110V /220V
Signal input	DVI